



IGCC®/IGMA®



中国·厦门



Content

简介	03
简约冷轧钢系列	05
瑞士进口W20/W40热轧钢系列	09
瑞士进口MTS50冷轧钢系列	15
玻璃工艺	19
胶条和玻璃压线	25
表面处理工艺	27
五金配件	29
工程案例	34



福建省费罗门窗是一家集进口中空玻璃和进口钢制门窗生产与一体的企业, 拥有15年欧美市场经验, 产品远销欧洲、美国、澳洲。

我们的主要产品包括:

简约钢制门窗系列

瑞士进口碳钢门窗系列


瑞士进口断桥钢门窗系列

豪华铁艺入户大门系列

豪华断桥铁艺入户大门系列

美国三银lowe玻璃系列

美国QUANEX超级间隔条中空玻璃

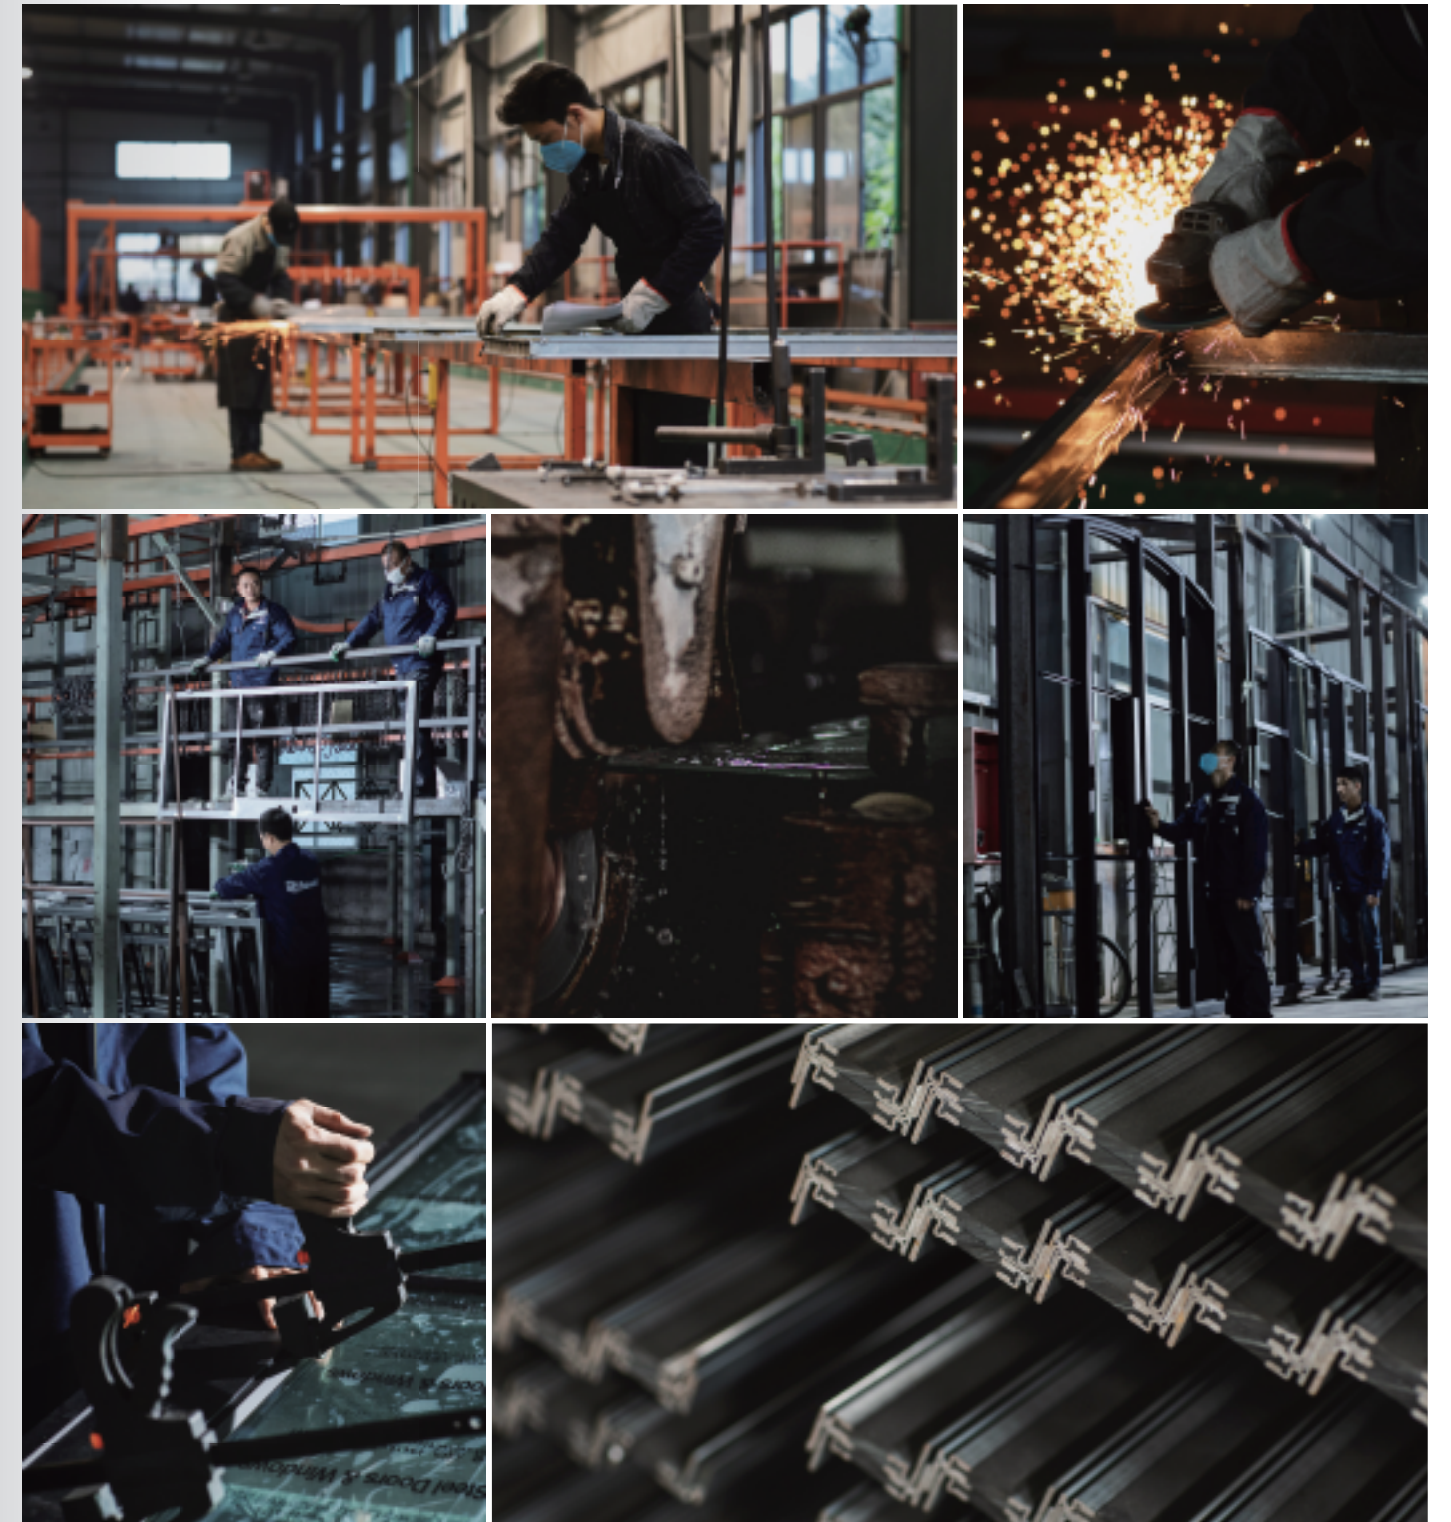



简约冷轧钢系列





Slim line Tubular steel

简约冷轧钢系列


- 1. 精准冷轧钢材
- 2. P型管型材
- 3. 发泡胶填充密封
- 4. 材料坚固, 型材极简
- 5. 中空玻璃最大可达37mm厚度
- 6. 可搭配多种玻璃扣条
- 7. 型材镀锌, 防腐质量上乘











TUBE

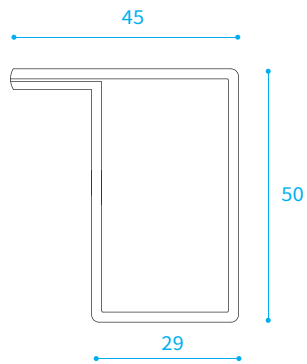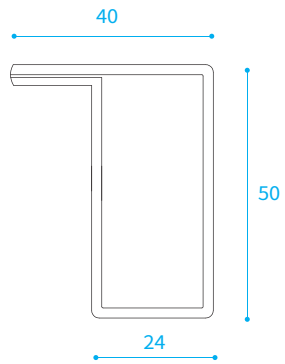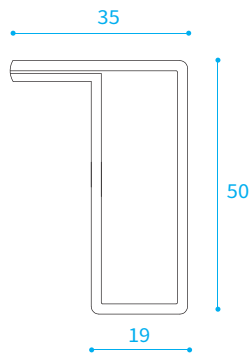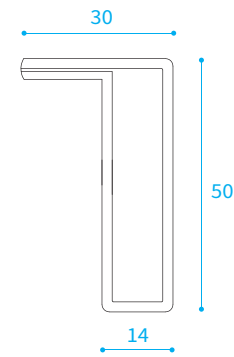

Slim line Tubular steel

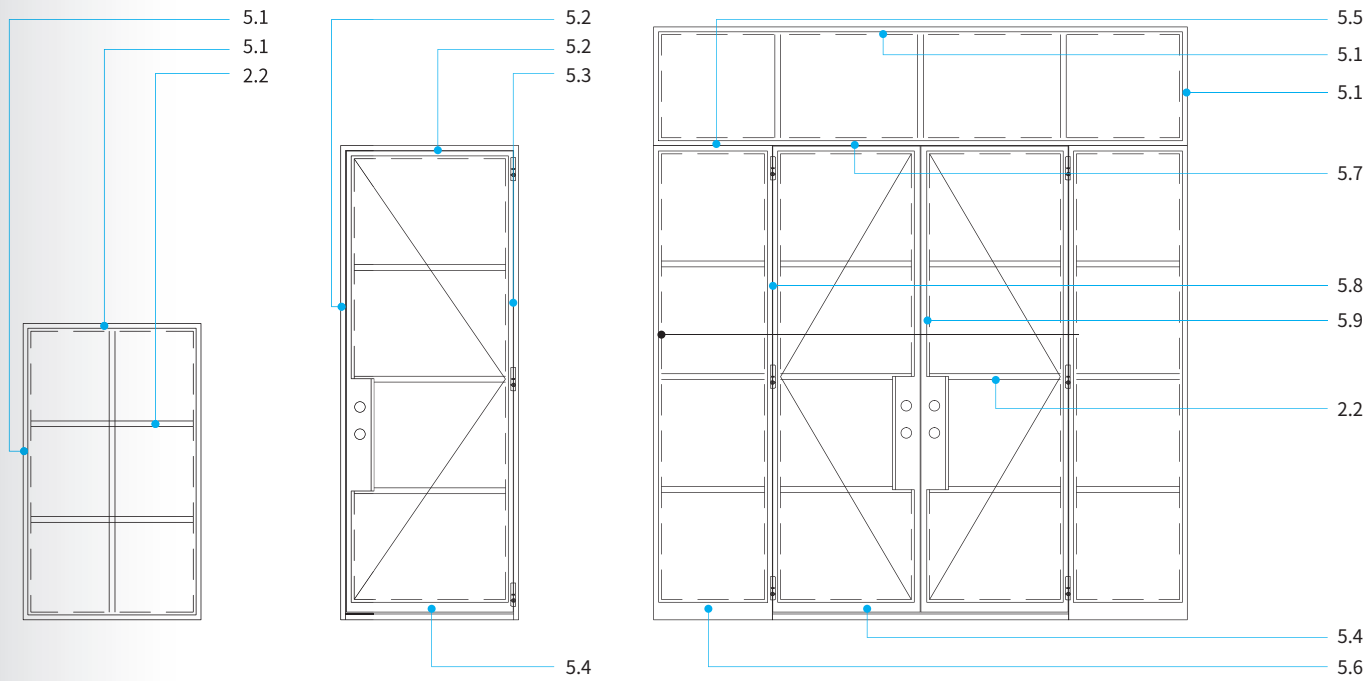

TUBE






瑞士进口W20/W40热轧钢系列

- 1. 欧洲进口热轧型材
- 2. 一体成型实腹型材
- 3. 型材最大壁厚可达5mm
- 4. 材料坚固, 型材极简
- 5. 中空玻璃最大可达27mm厚度
- 6. 可搭配多种玻璃压线
- 7. 型材镀锌, 防腐质量上乘




W20


W20

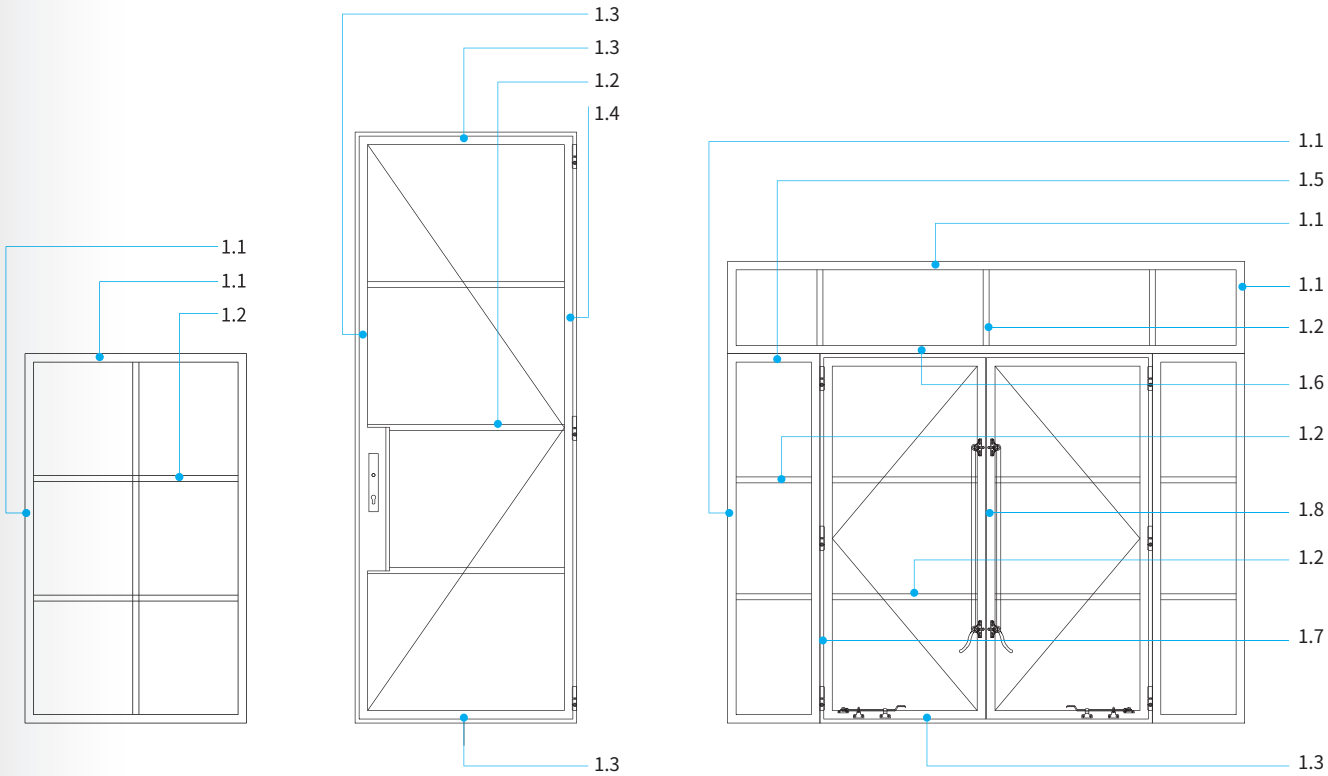


W20




3202(CF 3203ZF)




3204(CF 3203TF)




3205(CF 3203HF)




3201(CF 3203T2)




3210(CF 3203H)

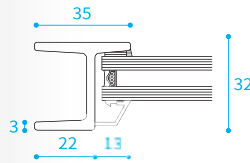


CROSS SECTION 1.1




CROSS SECTION 1.2

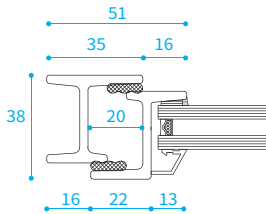


CROSS SECTION 1.3

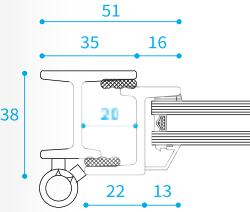


CROSS SECTION 1.4

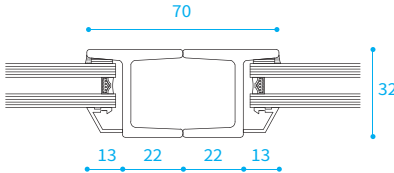


CROSS SECTION 1.5

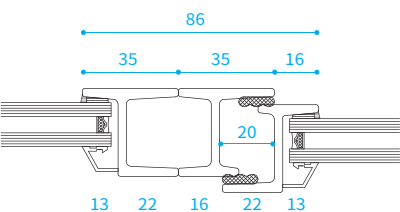

CROSS SECTION 1.6

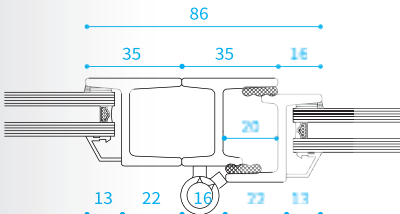

CROSS SECTION 1.7

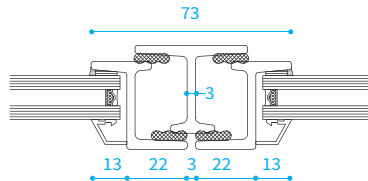


CROSS SECTION 1.8


1. 欧洲进口热轧型材
2. 一体成型实腹型材
3. 型材最大壁厚可达5mm
4. 材料坚固, 型材极简
5. 中空玻璃最大可达27mm厚度
6. 可搭配多种玻璃压线
7. 型材镀锌, 防腐质量上乘




W40

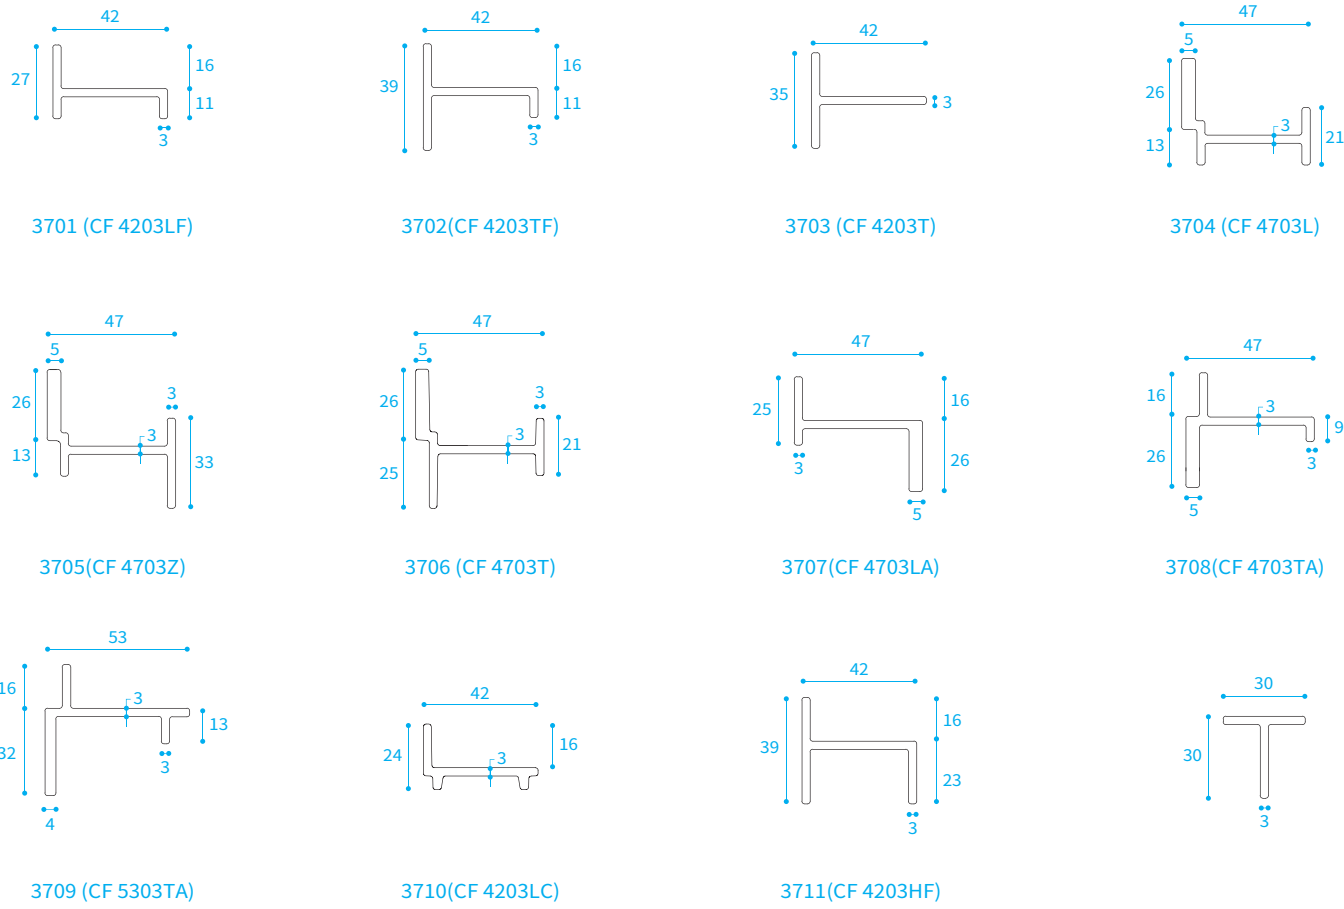

W40

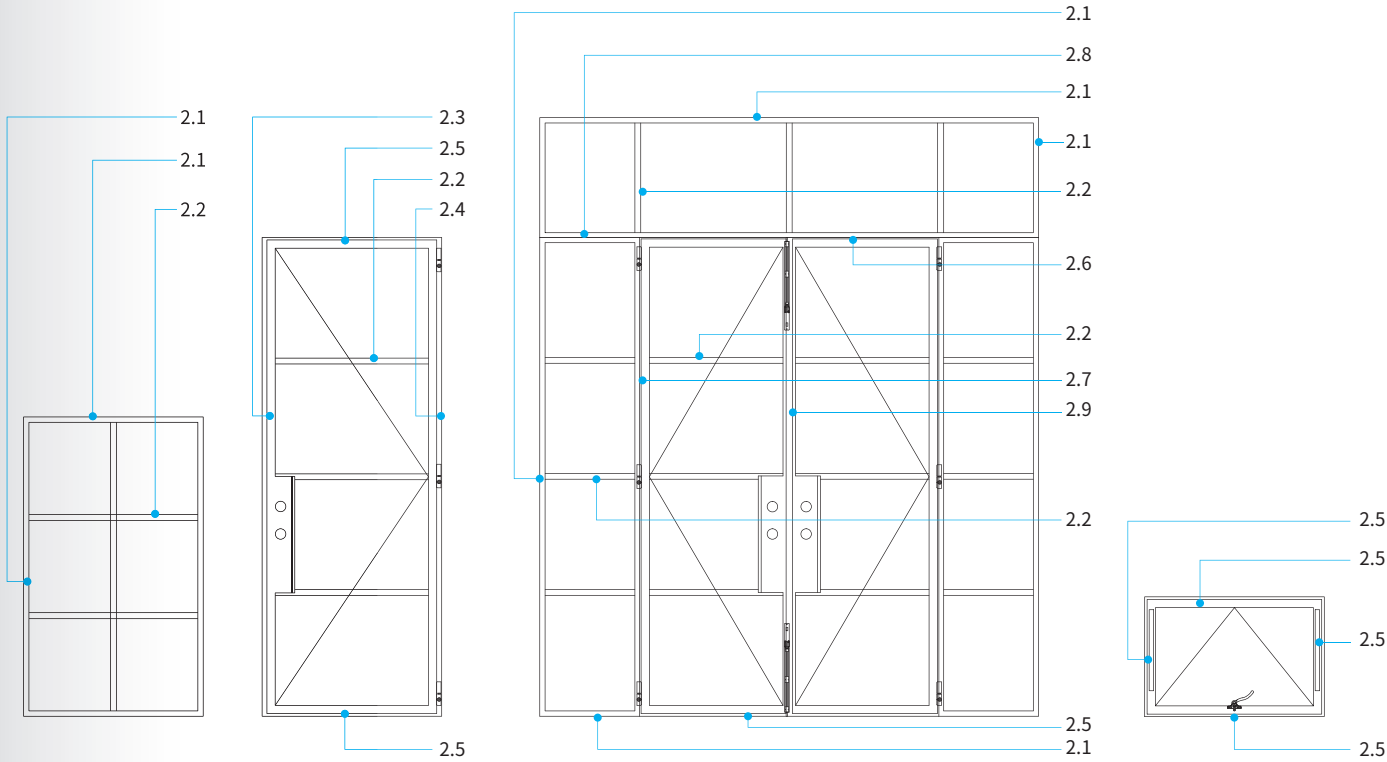

W40

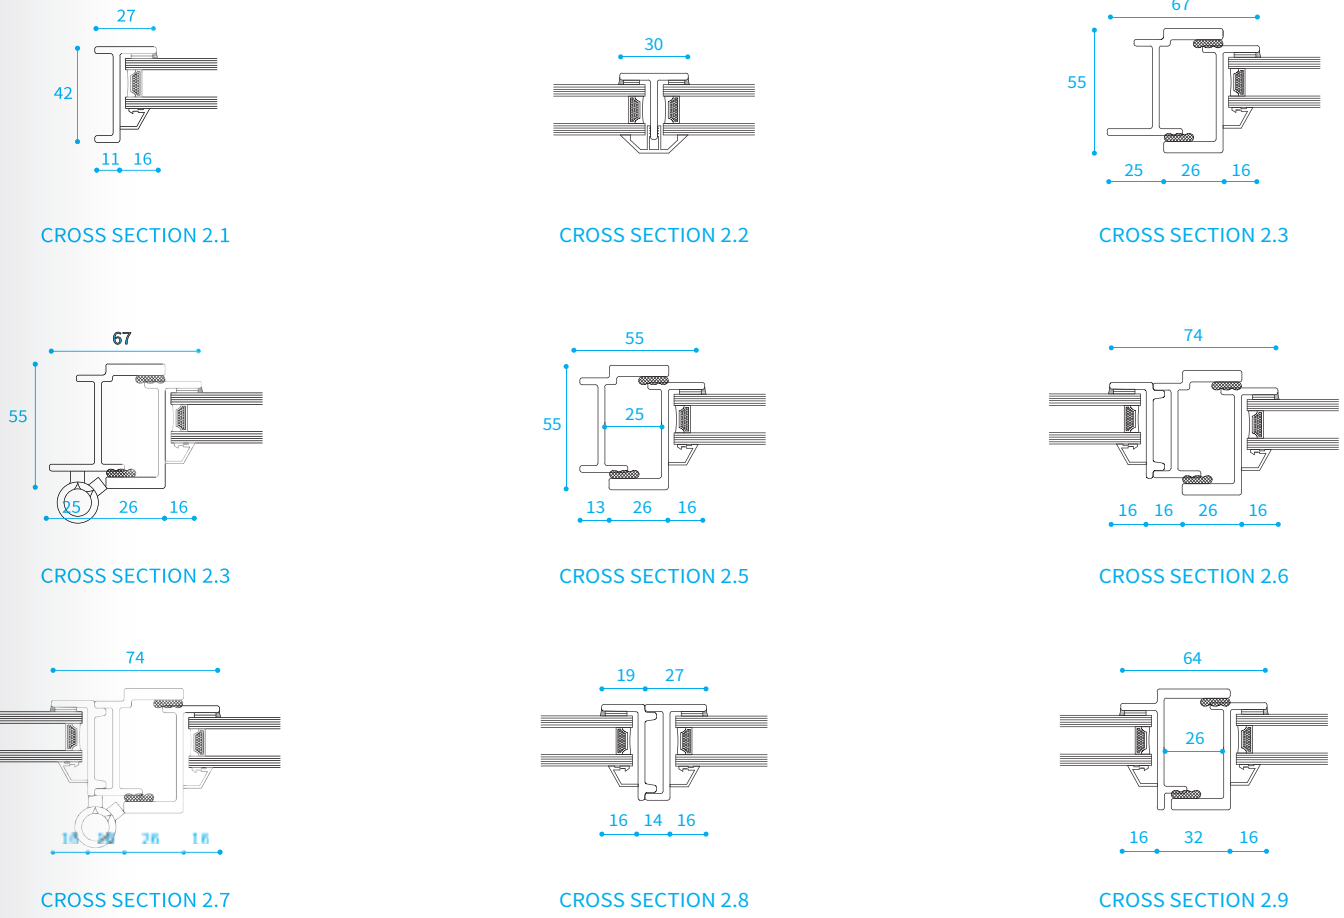




瑞士进口MTS50冷轧钢系列




- 1. 欧洲进口冷轧断热型材
- 2. 百年钢窗系统
- 3. 高压冷弯, 玻璃纤维断热
- 4. 材料坚固, 型材极简
- 5. 中空玻璃最大可达37mm厚度
- 6. 可搭配多种玻璃压线
- 7. 型材镀锌, 防腐质量上乘




MTS50

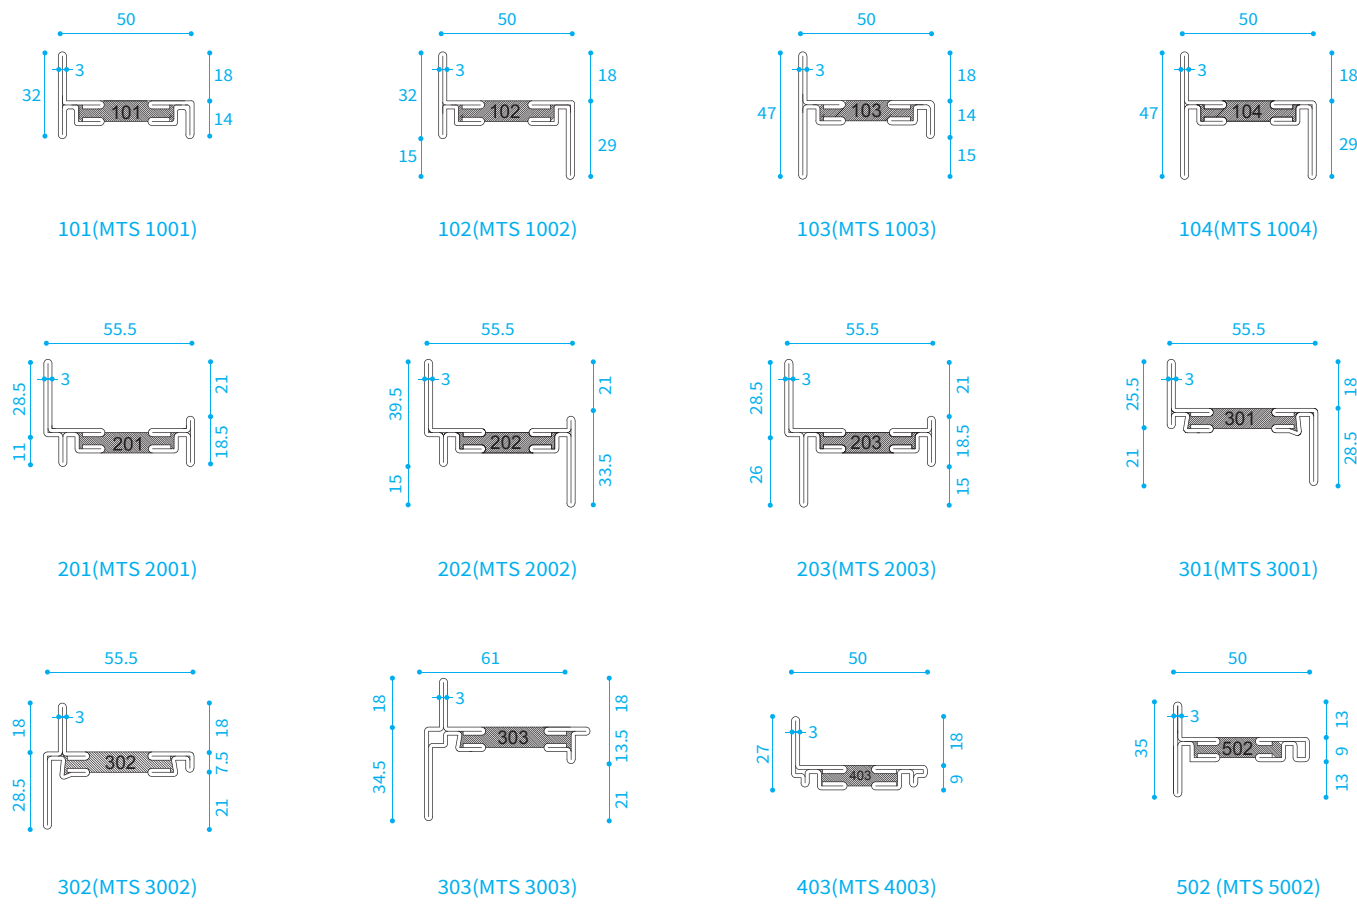

MTS50

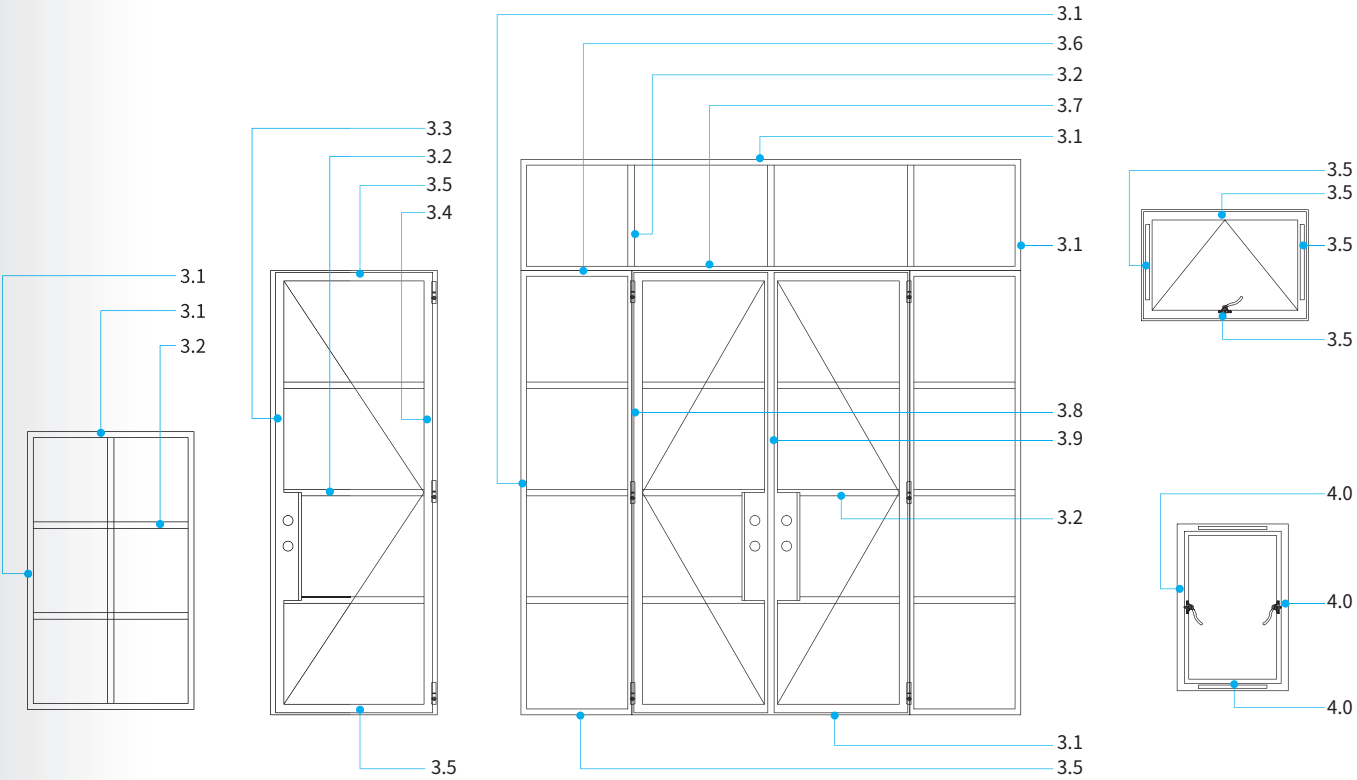


MTS50

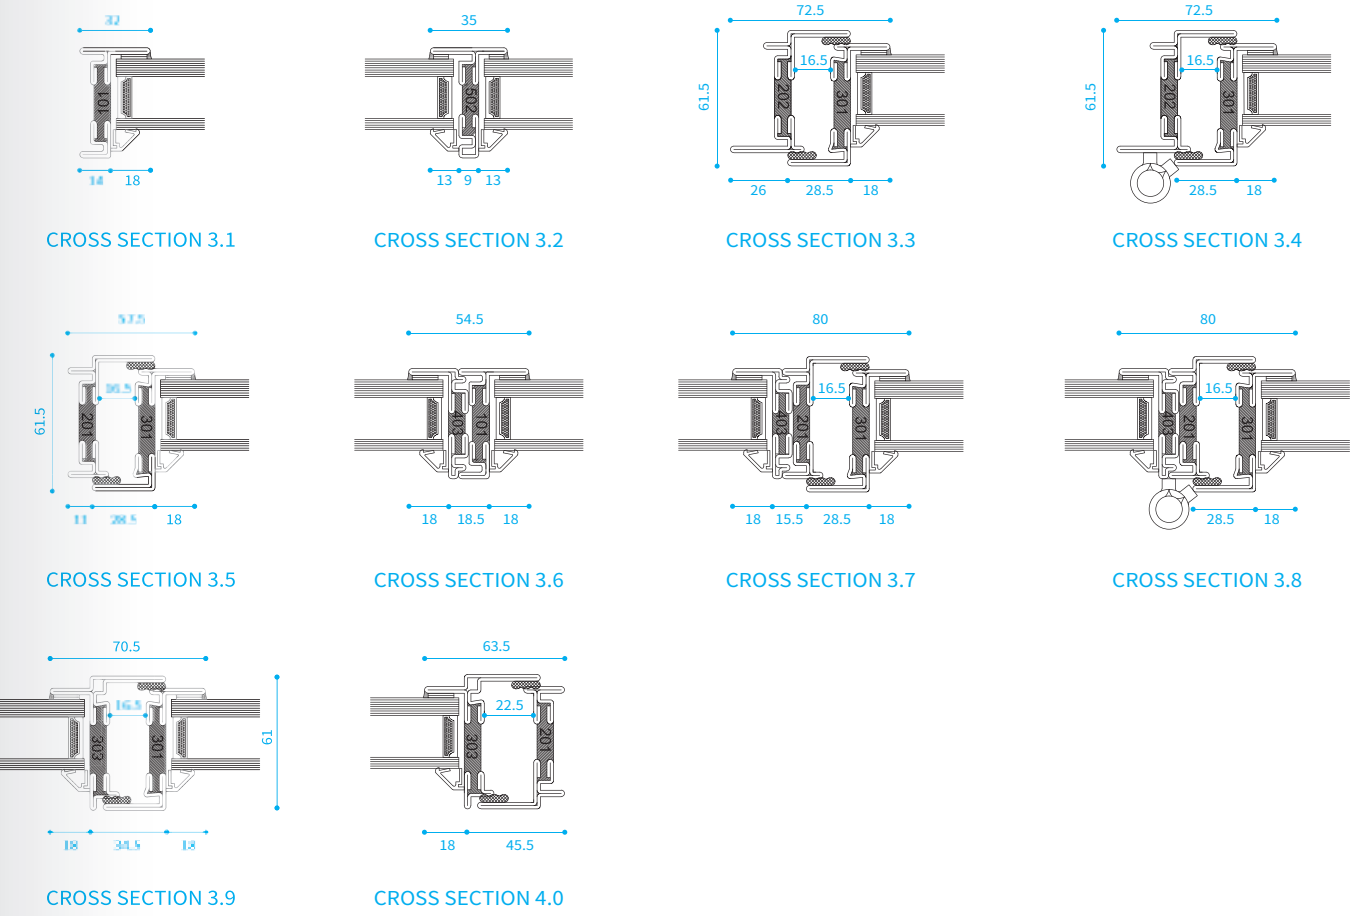

玻璃工艺

Insulating glass

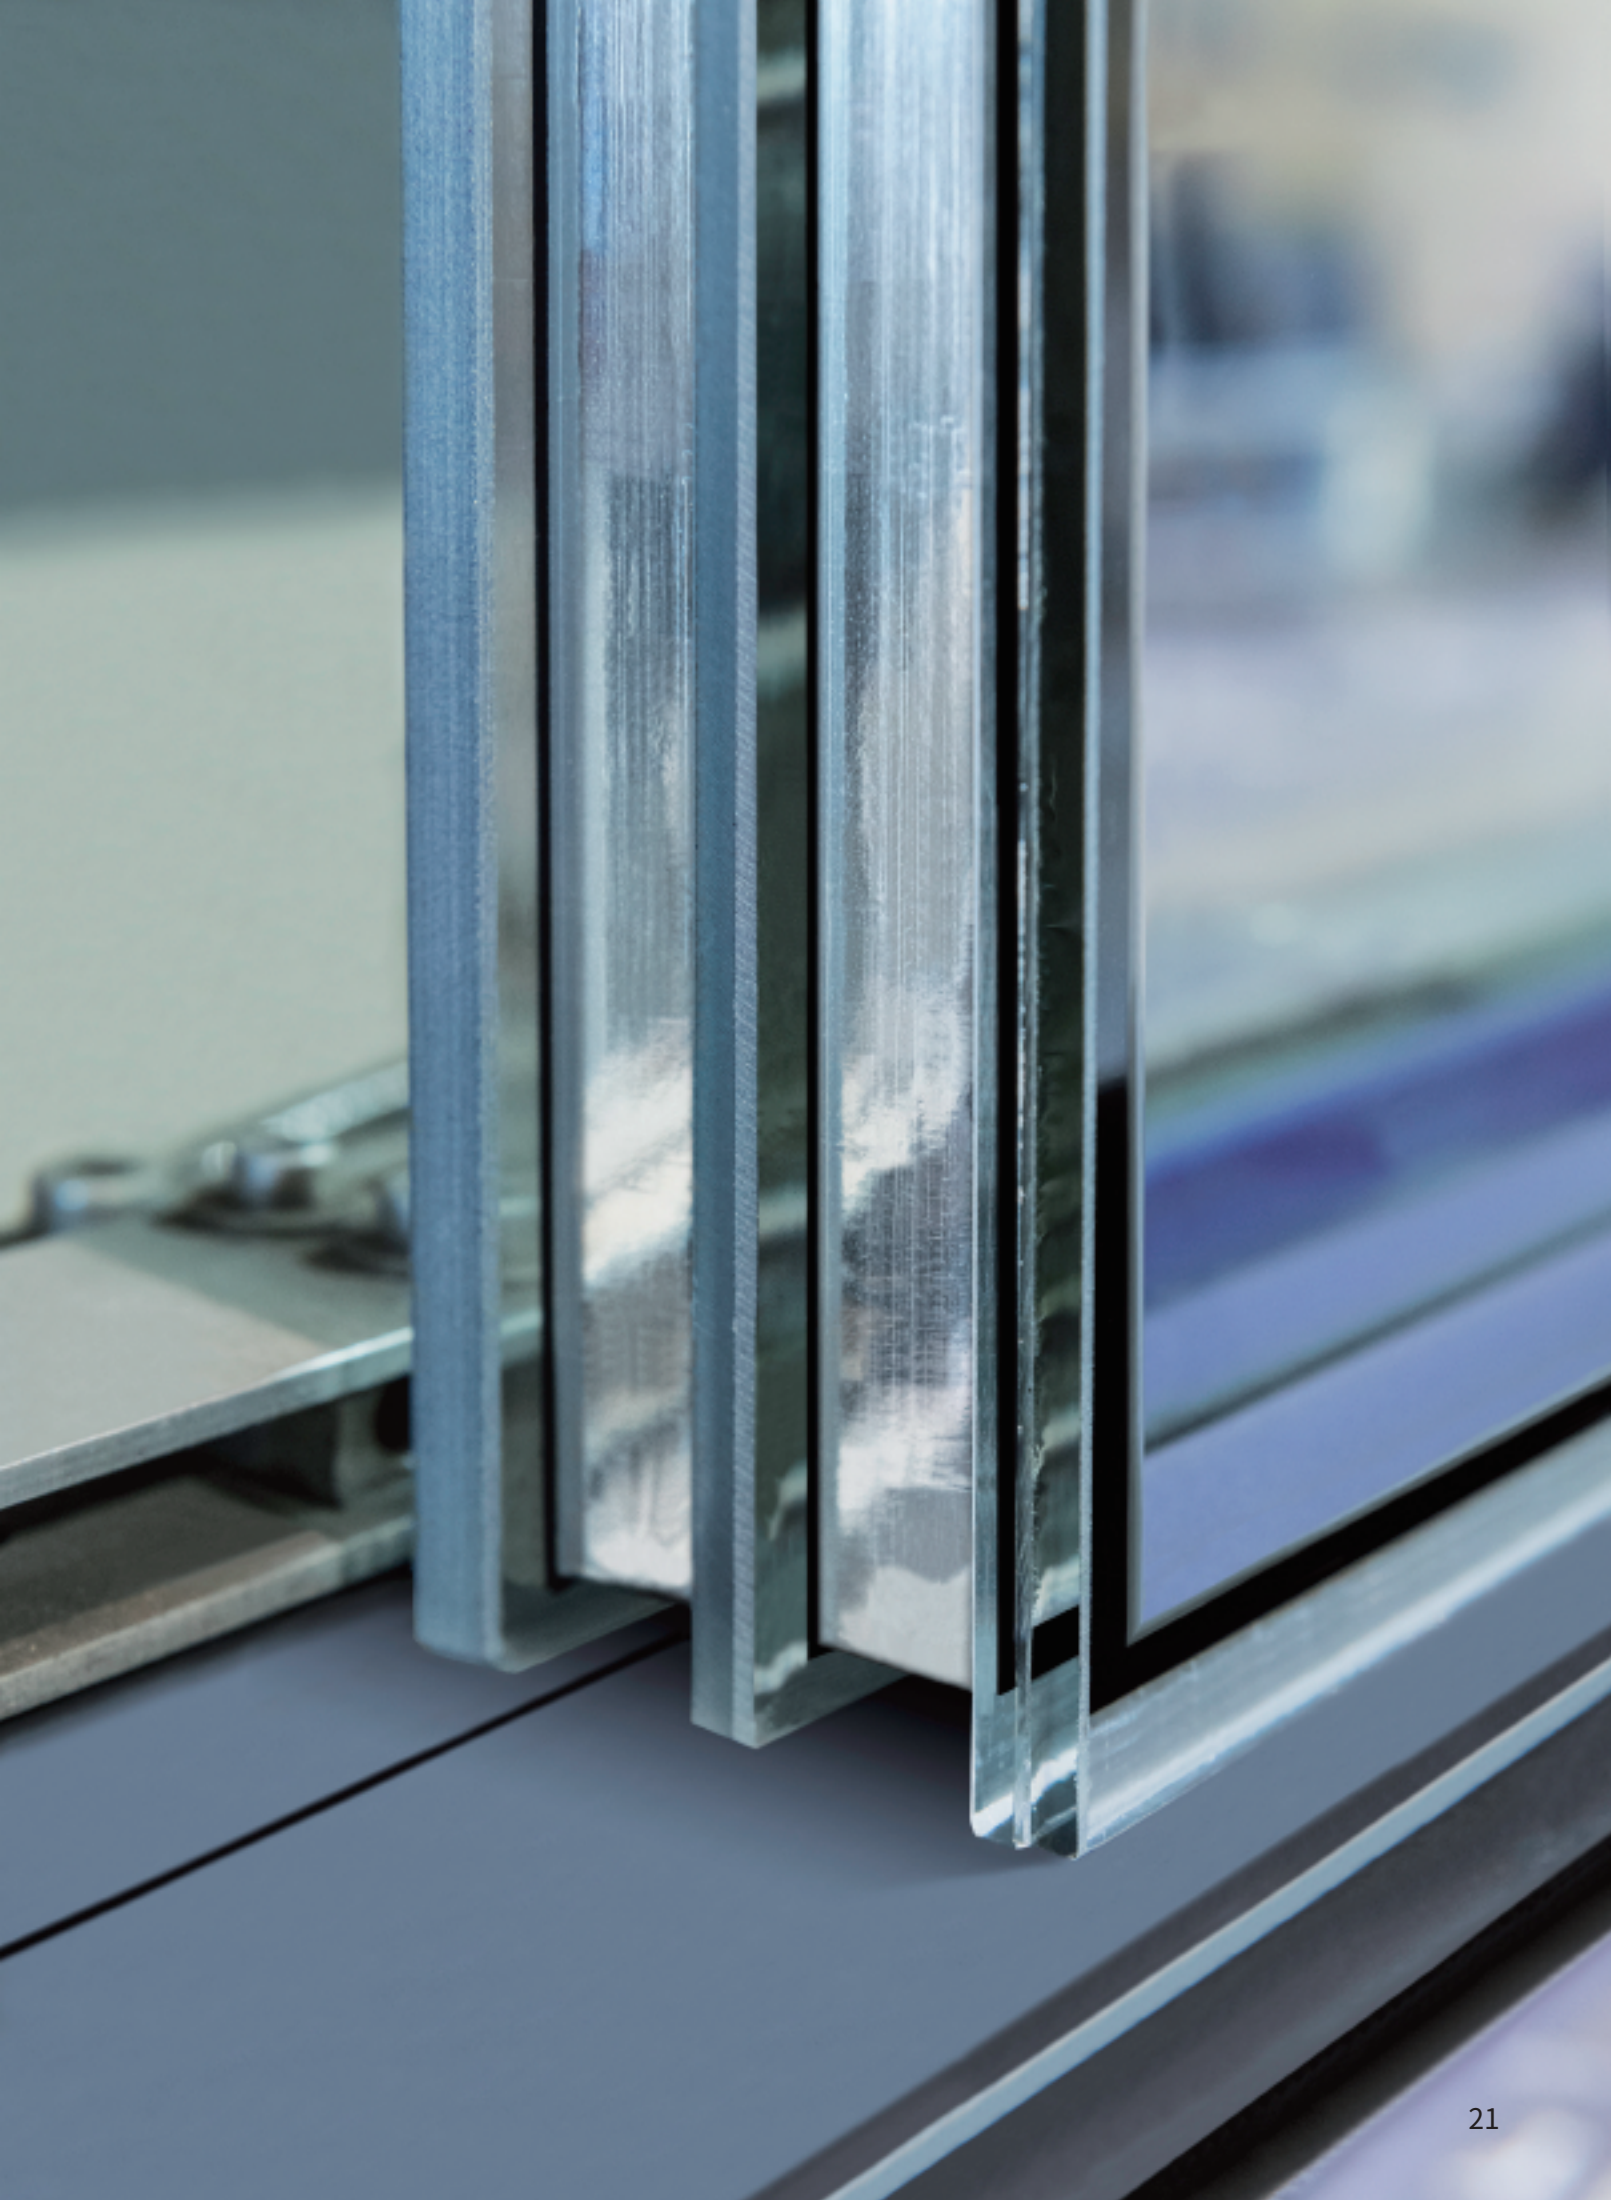


三银LOW-E玻璃

费罗门窗采用美国ppg三银lowe玻璃, 美国guardian三银lowe玻璃, 配合美国QUANEX超级间隔条, 中空隔热效果极佳, 完全符合被动房标准, 通过美国、澳洲认证。



产品结构 Product Configuration	反射色 Colour	可见光			太阳光		美标 NFRC 2010					中国JGJ151			欧标EN673		得热 系数 SHGC	光阳比 LSG
		透 射 比 Tvis%	反射比 Rvis%		Solar		U-value (W/m2.K)				SC	K-value (W/m2.K)		SC	U-value (W/m2.K)			
			室内	室外	透过	反射	空气 Air		氩气 Argon			空气 Air	氩气 Argon		空气 Air	氩气 Argon		
			Out	In	Tsol%	Rsol%	冬季 Winter	夏季 Summer	冬季 Winter	夏季 Summer								
6 Optiselec T70XL (非钢) +12A+6C	gray	64	12	13	24	50	1.62	1.55	1.34	1.23	0.31	1.61	1.31	0.35	1.55	1.22	0.27	2.37
6 Optiselec T70XL (非钢) +16A+6C	gray	64	12	13	24	50	1.67	1.29	1.40	1.01	0.31	1.66	1.37	0.35	1.31	1.08	0.27	2.37
6 Optiselec T70XLVT (N) + 12A+6C	gray	67	14	15	25	43	1.63	1.56	1.34	1.24	0.33	1.61	1.31	0.38	1.55	1.22	0.29	2.31
6 Optiselec T70XLVT(N)+ 16A+6C	gray	67	13	14	26	40	1.67	1.29	1.41	1.02	0.33	1.66	1.37	0.37	1.37	1.08	0.29	2.31

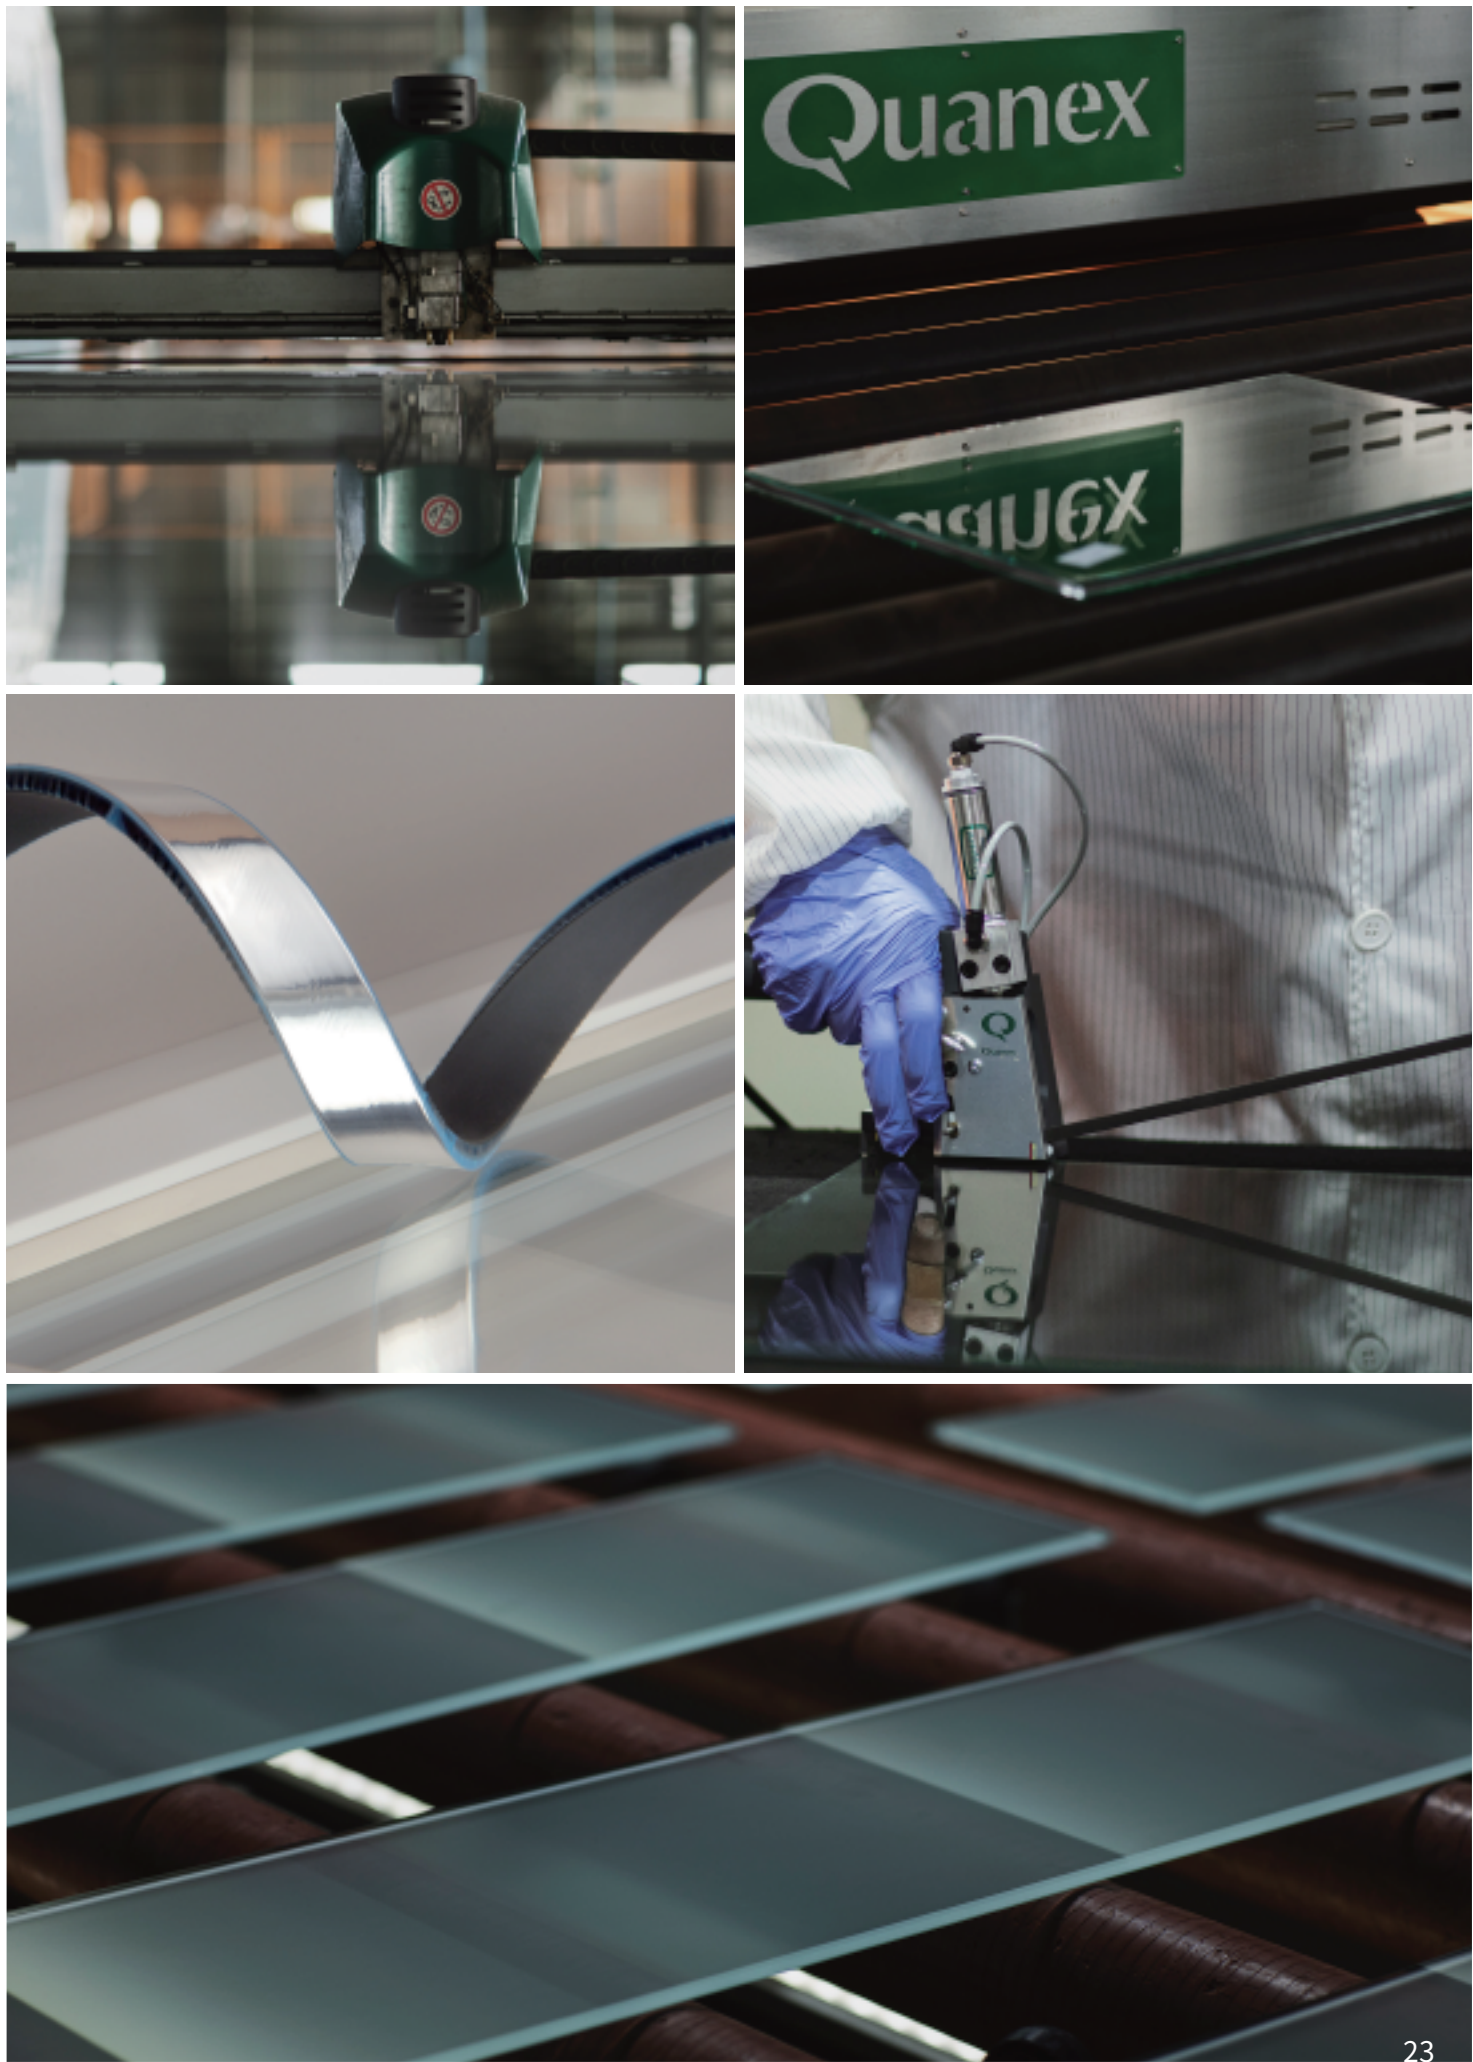

Super Spacer® Premium Enhanced

超级间隔条® Premium 是一种硅胶泡沫材质的柔性间隔条，其能够为绝缘单元的边缘密封部位提供最佳的热绝缘特性。

特性


- 低导热率
- 耐用的边缘密封
- 高度透气的柔性泡沫基质
- 高比例的干燥剂, 可用于吸收水分
- 极具吸引力的美学设计
- 高品质硅胶, 对臭氧、紫外线和氧化作

优点

- 卓越的氩气密封性
- 优化节能
- 改善窗户附近的环保性、舒适性和健康性
- 优良的缩合性、尺寸稳定性和颜色稳定性
- 极致耐用, 提供了可持续性性能
- 增值和分化
















性能

- 北美 ASTM E2188/ E2189/ E2190
- 欧洲 EN 1279
- 加拿大 CGSB 12.8
- 法国标准 CSTB, 针对 CEKAL Avis Technique
- 工业类型 P1 测试

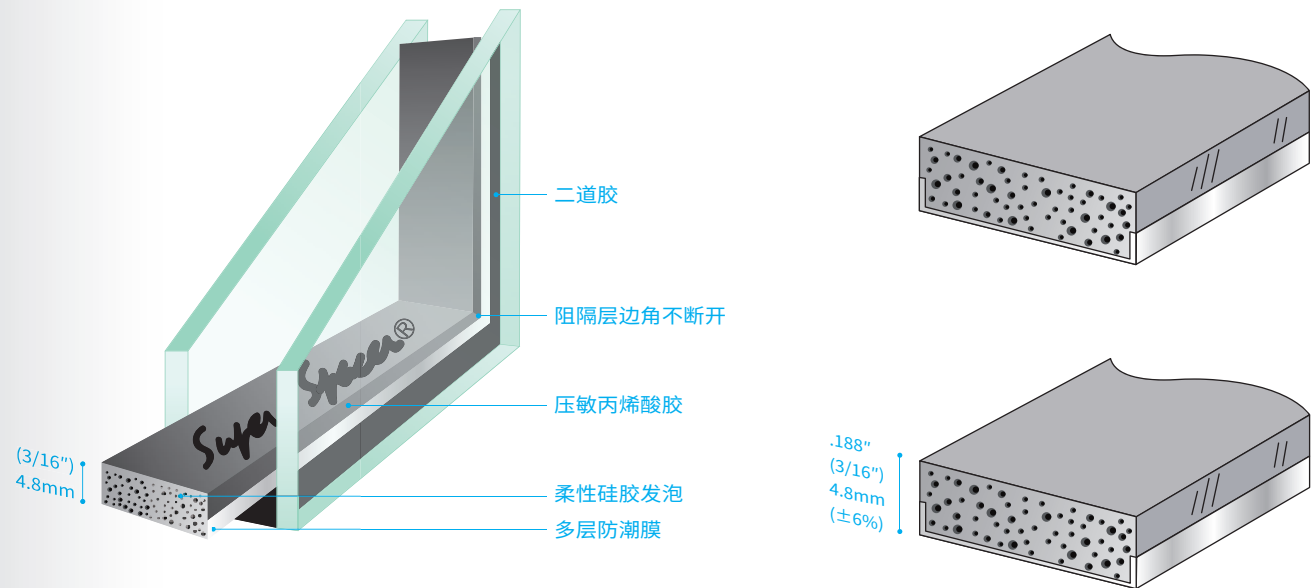

胶条和玻璃压线

Weather Strippings & Glazing beads

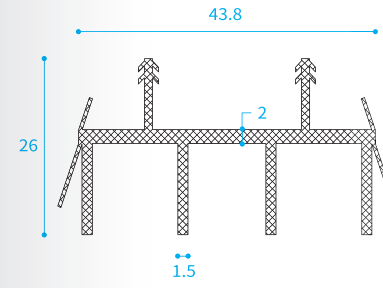

表面处理工艺

Surface Treatment

费罗门窗按照最严格的喷涂标准针对不同的产品采用不同的表面处理方式,具体如下:

1.简约冷轧钢系列

型材为镀锌材料

打砂等级为SA 2.5

第一层喷涂为富锌底漆

第二层喷涂为环氧封闭层

第三层喷涂为高端氟碳面漆

喷涂总厚度在150-180μ

2.瑞士进口W20/W40热轧钢系列

打砂等级为SA 2.5

第一层喷涂为热镀锌层

第二层喷涂为环氧封闭层

第三层喷涂为高端氟碳面漆

喷涂总厚度在150-180μ

3.瑞士进口MTS50冷轧钢系列

打砂等级为SA 2.5

第一层喷涂为富锌底漆

第二层喷涂为环氧封闭层

第三层喷涂为高端氟碳面漆

喷涂总厚度在150-180μ

喷涂层和颜色


费罗提供多样的喷涂方式和多种颜色供您选择,大部分都包含着报价中除少部分需要具体确认,我们同时也能实现劳尔色卡上的所有颜色。



色卡可选




Black 黑哑光



White 白哑光




Silver pewter 扫银




Antique copper 仿古



Light Bronze 扫铜



Heavy Bronze 重铜



Gold Rush 扫金




Taupe 浅棕

Door handle




费罗F03



材料:铜
适用类型:入户门
边心距:60/70
使用门扇厚:50mm



费罗F03



材料:铜
适用类型:入户门
边心距:60/70
使用门扇厚:50mm



进口单点锁
Hoppe single point lock

Dallas
M1643/2161N
Solid Brass

Polished Brass Resista®(F77-R)
Satin Nickel Resista®(F42-R)
Matte Black (F9714M)
Dark Bronze Metallic (F82)
Rustic Umber (F8709M)




Door handle

进口单点锁 Hoppe Multipoint lock

HLS® 7 Series Multipoint Hardware System

the next generation of Multipoint Locking Systems from
HOPPE North America, Inc.

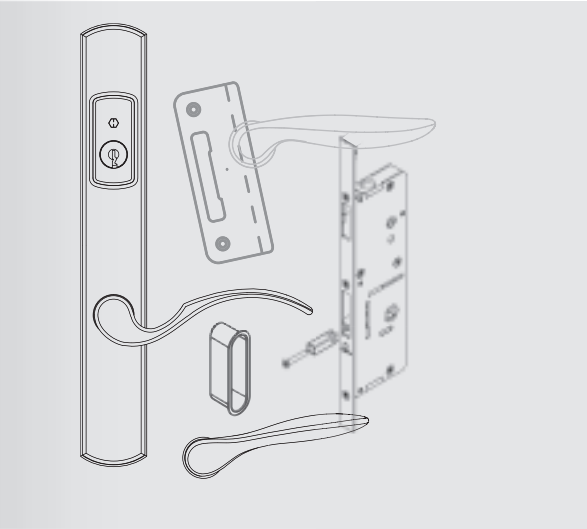

不锈钢以及其他防锈配件
防后驱动装置可防止锁从室外拆解, 以增加安全性
副锁安全系统确保多点锁系统在副锁启动后启动
内部系统上的锁止功能允许通过转动外部把手
驱动多点所系统

边心距45/60/70
多种款式把手可供选择
一体式锁体提升性能同时更易于安装
美式锁, 锁芯上, 把手在下
多锁点可同时开关
开/关 状态可通过旋钮轻易分辨

系统

- 天地插锁
- 锁舌
- 点状锁
- 天地插锁/点状锁
- 天地插锁/锁舌
- 副门天地插



关锁状态



开锁状态



Window Handles



B195K09F - Straight Classic Key-Locking Handle on 4-hole Backplate

Code: B195K09F Key Locking Window Handle (Face Fix)

A classic Straight Key-Locking Handle, which can be fitted directly to the window. Suitable for both residential and commercial properties. Fit to the window using 4 screws suitable for M5 Countersink holes.

直款把手带钥匙, 可直接装置与窗户上
适用于家用和商用场所



B195N09F - Straight Classic Handle on 4-hole Backplate

Code: B195N09F Window Handle (Face Fix)

A classic Straight Handle, which can be fitted directly to the window. Suitable for both residential and commercial properties. Fit to the window using 4 screws suitable for M5 Countersink holes.

直款把手
可直接装置与窗户上, 适用于家用和商用场所



B205N09F - Scroll Classic Handle on 4-hole Backplate

Code: B205N09F Window Handle (Face-Fix)

A classic Scroll Window Handle which can be fitted directly to the window. Suitable for both residential and commercial properties. Fit to the window using 4 screws suitable for M5 Countersunk holes.

弯款把手带钥匙
可直接装置与窗户上, 适用于家用和商用场所



Window Handles



B918N09F - Arched Classic Handle on 4-hole Backplate

Code: B918N09F Window Handle (Face Fix)

A classic Arched Handle, which can be fitted directly to the window. Suitable for both residential and commercial properties. Fit to the window using 4 screws suitable for M5 Countersink holes.

弧形把手
可直接装置与窗户上, 适用于家用和商用场所



B918N09FDU - Arched Classic Duplex on 4-hole Backplate

Code: B918N09FDU Duplex Window Handle (Face Fix)

A classic Arched Duplex (Handle, Nose and Connector) window handle, which can be fitted directly to the window. Suitable for both residential and commercial properties. Fit to the window using 4 screws suitable for M5 Countersink holes. A B646 connecting rod is required to link the handle and nose. Two different configurations are available for Open Out (O/G) and Open In (IG) windows.

弧形多点把手带钥匙
可直接装置与窗户上, 适用于家用和商用场所

Opener



B99S - Single Folding Opener with ring pull

Code: B99S Single Folding Opener

For Top Hung open out windows with the added feature of a ring pull so the opener can be used at height with a suitable rod. suitable screws for 5mm and 6mm fixings should be used

单点折叠款拉环把手
适用于上悬外开窗

Stay



B59 OG - Classic Slide Stay Butterfly

Code: B59 Slide Stay OG Butterfly

Features a Butterfly Thumb Turn to secure the stay and window in any desired position. Has a restrictor device for added security and safety. Suitable for both residential and commercial properties. For Outside Glaze (O/G) applications. 2 sizes available and all suitable brackets supplied for open out/outside glaze configured windows. Use screws suitable for M5 countersunk holes. Please contact us for information for inside Glaze (I/G) applications.

Sizes: 250/190mm 300/240mm

蝴蝶形经典滑撑，滑撑带旋钮可灵活定点, 适用于家用和商用场所



B395 - Straight Classic Peg Stay

Code: B395 Peg Stay

A classic Straight Peg Stay suitable for both residential and commercial properties. Fit to the window using B375 or S375 Fixing brackets. Full range of fixing brackets and accessories available for variable set up configurations

Sizes: 150mm 200mm 250mm

直款经典钉式支撑杆
经典支款设计, 多定点位, 适用于家用和商用场所

Projects





Projects



