


TECTUS®

The adjustable concealed door hinge

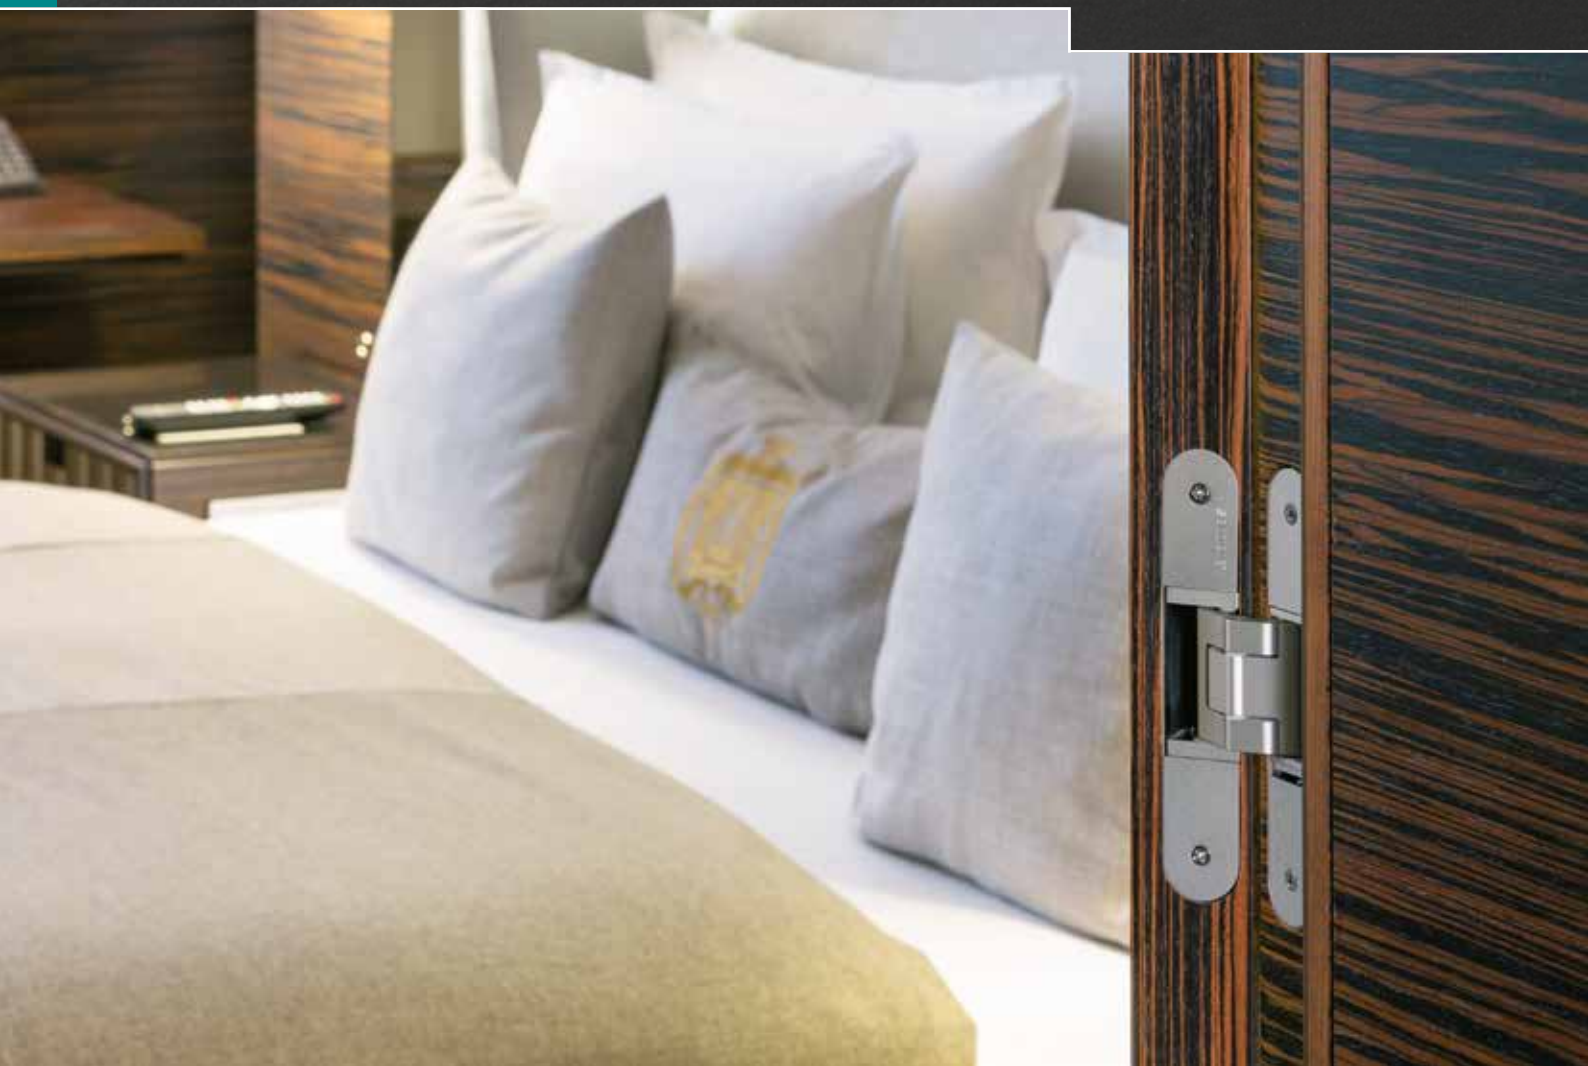

TECTUS® – THE ADJUSTABLE CONCEALED DOOR HINGE

TECTUS® – DESIGN MEETS FUNCTION

TECTUS enables the optimal integration of flush doors in straight line and flush surfaces for contemporary clean designs. The completely concealed hinge system TECTUS accepts load capacities up to 300 kg (661 lbs.), enables an opening angle of 180 degrees, and can be used on wood, steel and aluminum doors and frames. The three-dimensional adjustability and maintenance free slide bearing technology of TECTUS hinge systems can be used for high-quality residential and commercial doors.

THE FEATURES AT A GLANCE

- › For load capacities up to 300 kg (661 lbs.)
- › 3-way adjustable
- › 16 standard architectural finishes available
- › Models available in 304 and 316 solid stainless steel

TECTUS® – A FULL RANGE OF CONCEALED HINGES



TE 240 3D

Load capacities
up to 60 kg
(132 lbs.)



TE 340 3D

Load capacities
up to 80 kg
(176 lbs.)
UL listed for 20
minute fire door



TE 526 3D

Made of solid
stainless steel
Load capacities
up to 120 kg
(264 lbs.)
UL listed for 180
minute fire door



TE 527 3D

Made of
solid steel
Load capacities
up to 120 kg
(264 lbs.)
UL listed for 180
minute fire door



TE 540 3D

Load capacities
up to 120 kg
(264 lbs.)
UL listed for 20
minute fire door



TE 640 3D

Load capacities
up to 200 kg
(441 lbs.)
UL listed for 20
minute fire door



TE 645 3D

Load capacities
up to 300 kg
(661 lbs.)

TECTUS® – MODEL VERSIONS FOR SPECIAL APPLICATIONS



TECTUS® A8

Allows cladding thickness on the door and frame up to 8 mm (5/16")

Door panel can be opened a full 180 degrees

3 sizes for load capacities up to 300 kg (661 lbs.)



TECTUS® FVZ

Allows frame to be recessed up to 14 mm (0.551") inside a finished wall for a door flush with the wall's surface

For load capacities up to 100 kg (220 lbs.)



TECTUS® FIRE RATED

Models UL 10C listed up to 180 minutes

TECTUS® ENERGY – INTEGRATED AND CONTINUOUS ENERGY TRANSFER

Today's modern and efficient buildings often require the ability to control and operate doors remotely. This requires the transfer of electrical power and information from door frames to door panels. The TECTUS Energy Series provides a sophisticated way to utilize this technology when card readers, access and door control systems, electrified locks, monitoring systems, and multimedia components are installed. The cable with its 16 wires is completely concealed behind the hinge arms to prevent unauthorized tampering and has successfully passed a 1 million cycle test. The TECTUS Energy hinge is available in a variety of sizes to accommodate different door panel weights. Different adapters for simple reverse polarity protected plug connection are available.



TECTUS® Energy

With integrated and permanent energy transfer

Load capacities from 60 to 300 kg (132 – 661 lbs.)

Round cable

Plug connector and open ended cable with 3 m (9.8') or 10 m (32.8') length



Universal adapter

Plug connector and direct screw terminal block connector



Custom Adapters

Available upon request



VISIT OUR PRODUCTSELECTOR AT
www.simonswerk-usa.com

SIMONSWERK North America, Inc.

1171 Universal Boulevard
Whitewater, WI 53190
U.S.A.

☎ +1 262 - 472 - 9500

📠 +1 262 - 472 - 0218

info@simonswerk.com
www.simonswerk-usa.com
www.simonswerk-ca.com

© SIMONSWERK NORTH AMERICA, INC. - Flyer TECTUS®, 05/2020, 5 800530 0 00001/5.0
Although every effort has been made to avoid any errors during the preparation
of this brochure, SIMONSWERK does not accept responsibility for misprints and
subsequently specification changes. No changes can be made to this brochure
without the written consent of SIMONSWERK North America.

